

## For Commercial and Industrial Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# LEAD FREE\*

## Models OF744-10, OF844-12, OF948-16, OF1054-20 and OF1252-30 OneFlow® Anti-Scale System

Connection Sizes: ¾", 1" and 1¼" (20, 25, 32mm)

Flow Rates: 5 gpm to 30 gpm (38 lpm to 144 lpm)

The OneFlow® Anti-Scale System provides protection from scale formation on internal and external plumbing surfaces. The OneFlow® system may be installed at the point-of-entry to a building to treat both hot\* and cold water, or it can be located directly before a water heater, boiler, or other hot water-using device that requires protection from the ill effects of hard water.

OneFlow® prevents scale by transforming dissolved hardness minerals into harmless, inactive microscopic crystal particles. These crystals stay suspended in the water and are passed to drain, thereby having a greatly reduced ability to react negatively like dissolved hardness does. The system requires very little maintenance, no backwashing, no salt, and no electricity. Typical hardness problems, especially build-up of scale in pipes, water heaters, boilers and on fixtures are no longer a concern.

OneFlow® is not a water softener or a chemical additive (like anti-scalants or sequestrants). It is a scale prevention device with proven third party laboratory test data and years of successful residential and commercial applications. OneFlow® is the one water treatment device that effectively provides scale protection and is a great alternative to water softening (ion exchange) or scale sequestering chemicals.

### Features

- Chemical free scale prevention and protection – converts hardness minerals to harmless, inactive microscopic crystals making OneFlow® effective alternative technology to a water softener for the prevention of scale due to water hardness
- Virtually maintenance free – No salt bags or other chemicals to constantly add
- No control valve, no electricity and no wastewater
- Uses environmentally friendly "green" technology
- Improves efficiency of all water using appliances – both hot\* and cold

\* For hot water applications where water temperature is 110°F – 150°F (43°C – 66°C), please consult ES-OneFlow-HotWater



OF744-10 OF844-12 OF948-16 OF1054-20 OF1252-30

- Simple sizing & installation – all you need to know is pipe size and the peak flow rate
- Perfect system for towns or communities where water softeners are banned or restricted
- OneFlow® does not remove minerals or add sodium to the water supply
- OneFlow® can be installed as a pre-treatment to reverse osmosis (OneFlow® should be the last stage in treatment unless a point-of-use system is being used downstream.)

\*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

# WATTS®

## Models

Model	Maximum Flow Rate	Connection Sizes
OF744-10	10 gpm (38 lpm)	¾", 1" or 1¼" (19, 25, 32mm)
OF844-12	12 gpm (45.4 lpm)	¾", 1" or 1¼" (19, 25, 32mm)
OF948-16	16 gpm (60.8 lpm)	¾", 1" or 1¼" (19, 25, 32mm)
OF1054-20	20 gpm (76 lpm)	¾", 1" or 1¼" (19, 25, 32mm)
OF1252-30	30 gpm (114 lpm)	¾", 1" or 1¼" (19, 25, 32mm)

## Connection Options

¾" and 1" Sweat (19 and 25mm)

1" and 1¼" Plastic MPT (25 and 32mm)

## Replacement Media

OF744RM	Media should be replaced every 3 years
OF844RM	Media should be replaced every 3 years
OF948RM	Media should be replaced every 3 years
OF1054RM	Media should be replaced every 3 years
OF1252RM	Media should be replaced every 3 years

## Specifications

A OneFlow® scale prevention system shall be installed on the main water service pipe just after it enters the building, but after other whole building water safety devices (backflow preventers or pressure reducing valves), to effectively address water hardness concerns. A system may also be installed further downstream to protect specific equipment or areas within a plumbing system. The system shall be plumbed with a bypass valve to allow isolation of tank(s) and to allow the bypass of untreated water usage in the event that service or media replacement be necessary. The installation area should be suitable in size for the tank(s) to be serviced without encumbrance and sit upright on a flat level surface.

The system must not require additional wastewater to backwash, flush, or regenerate once put into service. The system shall not require any chemical additives and shall not require electricity for operation.

## Dimensions

Model	Dimensions									
	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
OF744-10	48½	1232	46	1168	7	178	2½	64	3	76
OF844-12	48½	1232	46	1168	8	203	2½	64	3	76
OF948-16	52½	1334	48	1219	9	229	2½	64	3	76
OF1054-20	59½	1511	57	1448	10	254	2½	64	3	76
OF1252-30	56½	1435	54	1372	12	305	2½	64	3	76

The overall height and the height of the fitting varies due to material variations and assembly tolerances. Please allow additional clearances above the tank for making connections.

## Peak Flow Rates — Weights

	OF744		OF844		OF948		OF1054		OF1252	
*Maximum Flow	10 gpm	37.8 lpm	12 gpm	45.4 lpm	16 gpm	60.6 lpm	20 gpm	75.7 lpm	30 gpm	113.6 lpm
Dry Weight	22 lbs.	10.0 kgs.	25 lbs.	11.3 kgs.	29 lbs.	13.2 kgs.	35 lbs.	15.9 kgs.	43 lbs.	19.5 kgs.
Service Weight	80 lbs.	36.3 kgs.	97 lbs.	44.0 kgs.	129 lbs.	58.5 kgs.	168 lbs.	76.2 kgs.	235 lbs.	106.6 kgs.

\*Exceeding maximum flow can reduce effectiveness and void warranty.

## Feed Water Chemistry Requirements

pH	6.5 to 8.5
Hardness (maximum)	75 grains (1300 ppm CaCO <sub>3</sub> )
Water Pressure	15psi to 100psi (103 kPa to 6.9 bar)
Temperature	40°F to 110°F (5°C to 43°C)*
Chlorine	< 3ppm
Iron (maximum)	0.3 mg/l
Manganese (maximum)	0.05 mg/l
Copper (maximum)	1.3 mg/l
Oil & H <sub>2</sub> S	None allowed
Polyphosphate	None allowed
Silica (maximum)	10 ppm

**Note:** Water known to have heavy loads of dirt and debris should be strained prior to OneFlow® using a wye-pattern strainer (100 mesh) or equivalent.


## Standards

DVGW – German Technical and Scientific Association for Gas & Water

OneFlow® meets standard W-512 for testing Physical Water Treatment devices for Scale Prevention and achieved an efficiency rating of 99.6% for scale prevention.

\*For hot water applications where water temperature is 110°F – 150°F (43° – 66°C), please consult ES-OneFlow-HotWater.

OneFlow® media has been tested and certified for material safety to NSF/ANSI Standard 42 and 61.

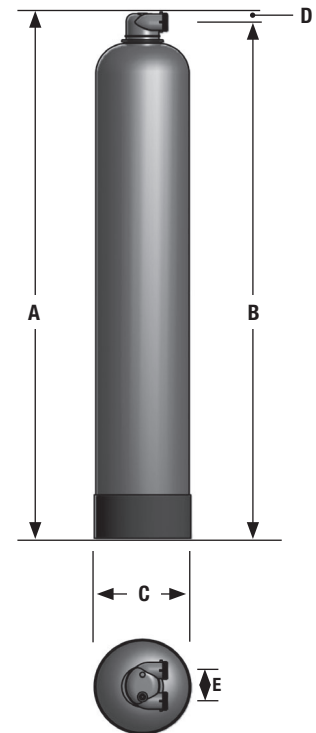

# WATTS®

A Watts Water Technologies Company



ISO 9001-2000  
CERTIFIED

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com

Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca